

ELECTO SJ



ELECTRONIC SINGLE JET METER

The ElecTo SJ is the single-jet meter that offers integrated data communication thanks to its innovative multi-protocol radio electronic register. This variant is designed for both indoor and outdoor residential applications and is available for cold and hot water. The LCD display simplifies data reading and makes additional information available to users and operators. Thanks to dual wM-Bus and LoRaWan communication, it offers maximum flexibility in short and long distance data communication and can be used with both mobile and fixed reading systems.


ELECTO SJ

FEATURES


- Electronic single jet meter
- For indoor and outdoor applications
- Available for hot and cold water
- DN: 15÷20
- MID-certified: R MAX 160
- High protection against external magnetic fields
- UV protection of display and protective cover
- Health certifications available for a number of countries
- Rotating register with IP68 rating
- Datalogging with a storage capacity of over 11,000 values
- Integrated wM-Bus, OMS and/or LoRaWAN radio
- Optimized antenna for maximum radio range
- Lithium battery with a minimum life of 13 years in dual mode (varies depending on the configuration chosen)
- Fault detection: fraud, probable leak, overconsumption, reverse flow, blocked meter and reversed meter
- Programming and testing kit available upon request



TYPICAL ERROR CURVE

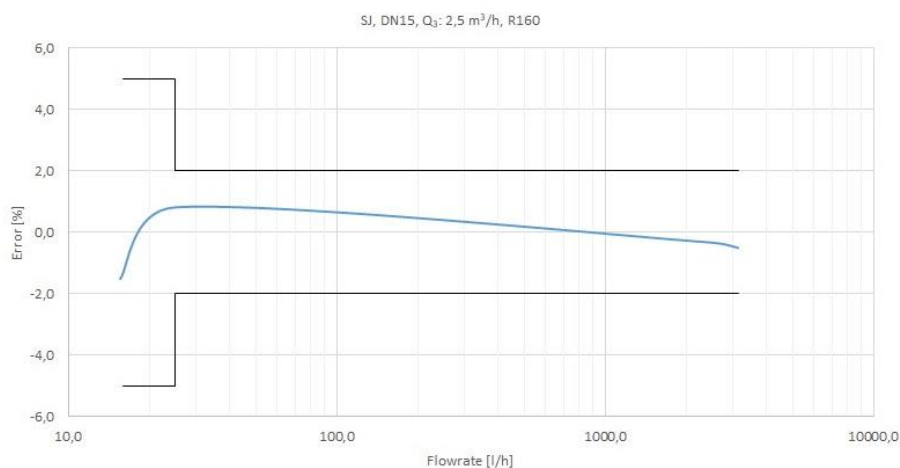

HEAD LOSS DIAGRAM

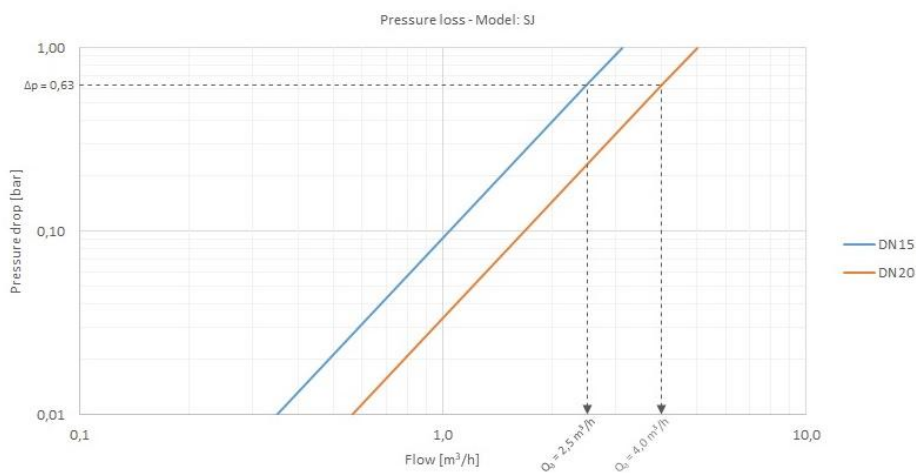

METROLOGICAL PERFORMANCE

Size	mm	15	20
	in	½	¾

Module B no.	TCM 142/20 – 5700
--------------	-------------------

Module D no.	0119-SJ-A010-08
--------------	-----------------

$Q_3/Q_1 = R$ Referred to installation position	$H \uparrow \leq 100$ $H \rightarrow; V \downarrow \leq 50$ $V \uparrow \leq 40$	$H \uparrow \leq 160$ $H \rightarrow; V \downarrow \leq 80$ $V \uparrow \leq 63$	$H \uparrow \leq 100$ $H \rightarrow; V \downarrow \leq 50$ $V \uparrow \leq 40$	$H \uparrow \leq 160$ $H \rightarrow; V \downarrow \leq 80$ $V \uparrow \leq 63$
--	--	--	--	--

MID standard performance *				
Q_3	m³/h	1,6	2,5	4
Q_4	m³/h	2	3,13	5


R		100		
Q_1	l/h	16	15,63	40
Q_2	l/h	25,60	25,01	64

* Other values of R available upon request.

TECHNICAL DATA

Maximum permissible error between Q ₁ and Q ₂ (excluded)		+/- 5%	
Maximum permissible error between Q ₂ (included) and Q ₄		+/- 2% with water temperature ≤ 30°C +/- 3% with water temperature > 30°C	
Temperature class		T30,T50,T30/90	
Flow profile sensitivity classes		U0 – D0	
Starting flow rate	l/h	4,5	8
Head loss		ΔP63	
Nominal pressure	bar	16	
Maximum reading	m³	999.999	
Minimum reading	l	1	
Indicative weight	kg	0,40	0,57

DIMENSIONS

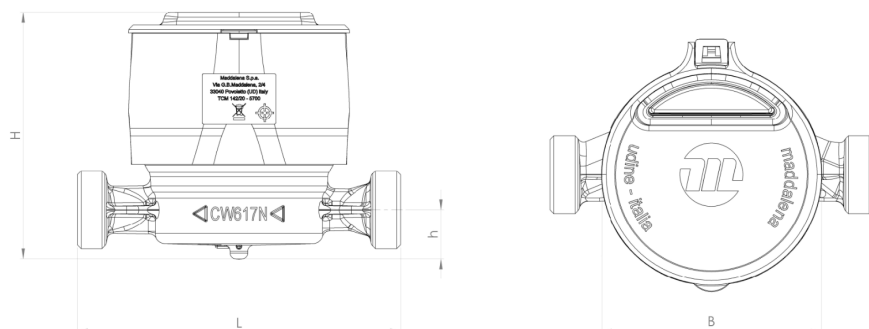

Size	mm	15		20
	in	½		3/4"
Thread	in	G ¾ B		G 1 B
L	mm	80*/110/115/120/130 *only Q ₃ 2,5 R ≤H100 VR63	80*/110/115/120/130 – *Starting flow rate 7l/h	115/130
H	mm	84		
h	mm	16,7		16,7
B	mm	75		

COMMUNICATION MODULES



MULTI

