

ELK CROSS FRONT

**TRINCIAERBA FRONTALE
PER TRATTORI DA 50 a 70 CV
FRONT TRACTOR FLAIL MOWER
FOR 50 TO 70 TRACTOR HP**

VIDEO 



Caratteristiche

- Trinciafossi frontale al trattore.
- Per trattori da 50 a 70 CV.
- Comodità di utilizzo frontale al senso di marcia.
- Per manutenzione comunale, stradale, Parchi fotovoltaici e superfici agricole.
- Adatta per taglio erba su argini e fossi fino a 150cm di altezza.
- Ottima qualità di taglio e triturazione.
- Triturazione rami fino a 4cm di diametro.
- Di facile utilizzo su varie pendenze o taglio siepi.
- Con sistema di sicurezza antishock su attacco a 3 punti e valvole idrauliche antiurto.
- Moltiplicatore con ruota libera.

Features

- Ditch mower for front tractor fitting.
- For 50 to 70 HP tractors use.
- Convenient front-facing operation.
- For municipal, roadside maintenance, photovoltaic parks, and agricultural fields.
- Suitable for cutting grass on embankments and ditches up to 150 cm in height.
- Excellent cutting and shredding quality.
- Shredding branches up to 4 cm in diameter.
- Easy to use on various slopes or for hedge trimming.
- With anti-shock safety system on 3-point hitch and hydraulic shock valves.
- Gearbox with overrun clutch.



MODELLO MODEL		 (MIN - MAX)		
	(MM)	(HP)	(KW)	Nr.
ELK CROSS FRONT 1400	1165	50 - 60	36 - 44	18
ELK CROSS FRONT 1600	1355	60 - 70	44 - 51	20




COMPONENTI TECNICHE DI SERIE TECHNICAL COMPONENTS STANDARD



Slitte laterali.
Side skids.



Rullo + raschiarullo.
Roller + scraper.



Valvola Idraulica e Molle
protezione trincia in caso
di urto.
Hydraulic valve and
springs for mower
protection in case of
impact.


LAME STANDARD INCLUDED BLADES



Mazza in acciaio forgiato e temperata di 0,6Kg.
Forged steel and hardened heavy hammer of
0,6Kg.

MISURE SPOSTAMENTO IN FASE DI LAVORO DISPLACEMENT MEASURES DURING WORK

MODELLO MODEL	A mm	B mm	C mm	D mm	E mm
ELK CROSS FRONT 1400	700	1160	1860	1430	2350
ELK CROSS FRONT 1600	700	1360	2060	1430	2550

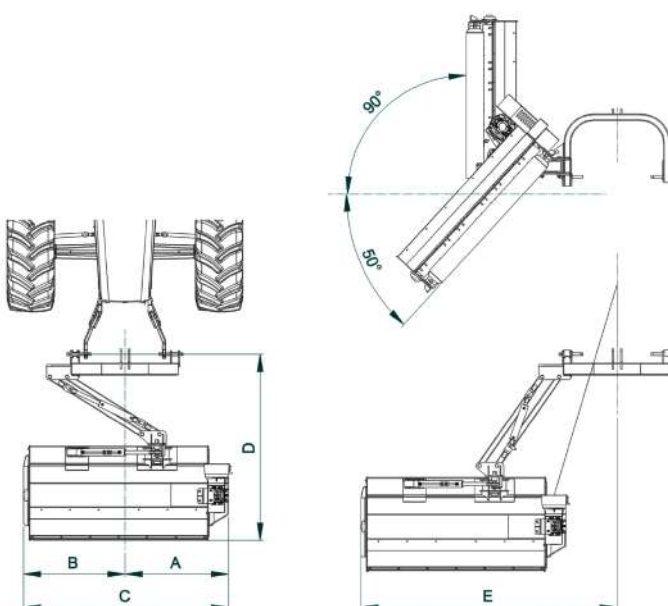

MODELLO MODEL					
	(MM)	(KG)	(RPM)	(LxPxH)	(LxPxH)
ELK CROSS FRONT 1400	20 - 75	400	540	1810 x 1600 x 840	1800 x 1100 x 900
ELK CROSS FRONT 1600	20 - 75	430	540	2140 x 1600 x 840	2200 x 1100 x 900