

SPIKE-X

AERATORE TRAINATO
TOWED AERATOR

- Taglia, Arieggia, Decompatta,
Rolla in un unico passaggio
- Cut, Aerate, Decompact,
Roll in one pass only



Benefici


- Velocità di manutenzione coprendo ampie superfici.
- Migliore assorbimento di nutrienti aria e acqua
- Migliore drenaggio del terreno
- Rinforza l'apparato radicale
- Previene lo sviluppo dei patogeni.
- Per tutti i trattori da 20CV
- Veloce sostituzione alberi lame o carotatura.
- Decompattazione del terreno per migliore giocabilità.
- Migliora e rinforza l'apparato radicale dell'erba
- Miglioramento della giocabilità e salute del manto.
- Sostituisce il funzionamento di più macchine in una.
- Soluzione economica per la manutenzione del prato.

Benefit


- Maintenance speed covering large areas.
- Improved absorption of nutrients, air, and water
- Improved soil drainage
- Strengthens the root system
- Prevents the development of pathogens.
- For all tractors from 20HP tractors.
- Fast blade or coring shaft change.
- Soil decompaction for improved playability.
- Improves and strengthens grass roots
- Improved playability and turf health.
- Replaces operation of multiple machines in one.
- Economical solution for lawn maintenance.

MODELLO MODEL		 (MIN - MAX)			Ø Ext.20 - Int.12,5 mm 	
	(MM)	(HP-KW)	Nr.	L.: cm	Nr.	L.: cm
SPIKE-X 130 - 10	1300	20/30 - 15/22	84	10		
SPIKE-X 130 - 20	1300	20/30 - 15/22	42	20		
SPIKE-X 130 - T	1300	20/30 - 15/22			56	14
SPIKE-X 180 - 10	1800	30/40 - 22/30	120	10		
SPIKE-X 180 - 20	1800	30/40 - 22/30	60	20		
SPIKE-X 180 - T	1800	30/40 - 22/30			80	14

COMPONENTI TECNICHE DI SERIE TECHNICAL COMPONENTS STANDARD

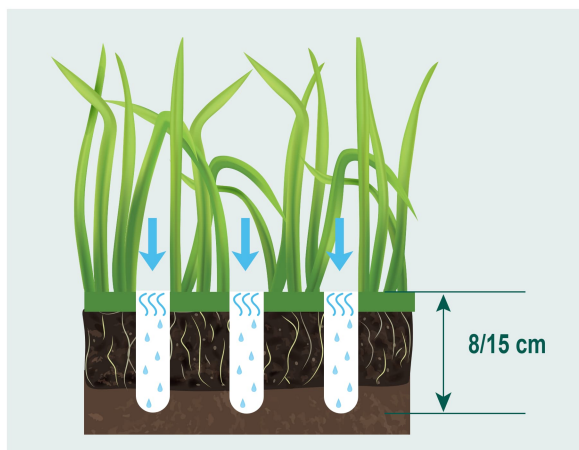

*Benefici su manto erboso dopo i primi passaggi di taglio.
Benefits on turf surface after the first few cutting sessions.*

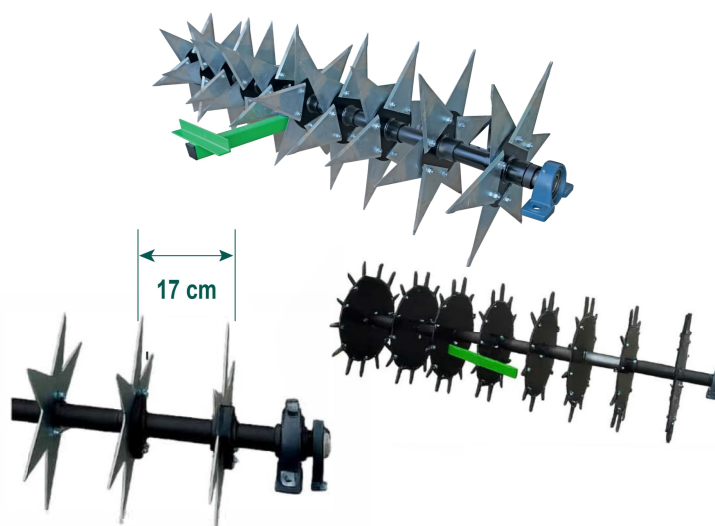

*Robusti alberi intercambiabili da lame a carotatura.
Robust interchangeable shafts from blades to coring*



*Pianale superiore per posizionamento peso per una migliore taglio in profondità a seconda del terreno.
Upper platform for weight positioning for better cutting depth depending on soil compaction.*

MODELLO MODEL	3P	Kg			
	Categoria / Category	(KG)	mt² / h	Ettari / Hectares	(LxPxH)
SPIKE-X 130 - 10	1	210	19.500	1,95	1420 x 850 x 800
SPIKE-X 130 - 20	1	210	19.500	1,95	1420 x 850 x 800
SPIKE-X 130 - T	1	240	19.500	1,95	1420 x 850 x 800
SPIKE-X 180 - 10	1	270	27.000	2,70	1920 x 850 x 800
SPIKE-X 180 - 20	1	270	27.000	2,70	1920 x 850 x 800
SPIKE-X 180 - T	1	300	27.000	2,70	1920 x 850 x 800